

## 特徴 / Features

- 小型軽量化
- 点火装置 (CDI) 用

- ★ It is smaller and lighter.
- ★ Ignition device (CDI)


## 規格 / Specifications

使用温度範囲 Temp. range	-40~85°C (+105°C)※1
定格電圧 Rated voltage	250Vdc
静電容量 Capacitance	0.47~1.2μF
静電容量許容差 Cap. tolerance	±5%(J), ±10%(K)
誘電正接 Tangent of loss angle	0.010 <sub>max</sub> (at 1kHz)
耐電圧 Voltage Proof	WV×150% 60sec or WV×175% 1~5 sec
絶縁抵抗 Insulation resistance	EDP CODE 0000 : 3,000Ω F <sub>0.1</sub> more (100Vdc/1 min) EDP CODE 0A20, 0A60 : 500Ω F <sub>0.1</sub> more (100Vdc/1 min) EDP CODE 0A34 : 3,000Ω F <sub>0.1</sub> more (100Vdc/1 min)

※1 ( ) 温度は電圧軽減による使用可能範囲です。

※1 ( ) Marked temperature shows operatable when voltage is derated.

## 寸法 / Dimensions (mm)

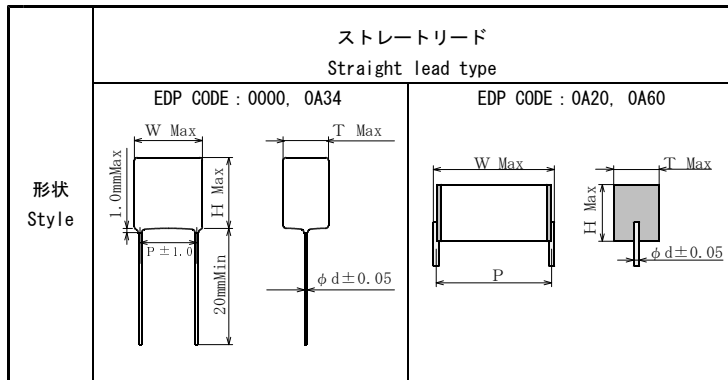

EDP CODE	Cap. CODE	Cap (μF)	外形寸法 (mm)				
			W	H	T	P	φ d
0000	105	1.0	13.0	13.0	8.0	10.0	0.6
	125	1.2	13.0	14.5	8.0	10.0	0.6
0A34	105	1.0	13.0	14.0	7.5	10.0	0.6
	125	1.2	13.0	16.0	7.5	10.0	0.6
0A20	474	0.47	11.4	9.0	4.5	10.0	0.6
	684	0.68	11.4	13.0	5.0	10.0	0.6
0A60	684	0.68	16.5	8.5	6.4	15.0	0.8
	105	1.0	16.5	9.0	8.0	15.0	0.8